



CPX 4180P-II is an 18 x 12 watts outdoor RGBW LED Par. Its heavy duty and robust built, with an IP65 rating, makes it the 1st choice multipurpose Par for all professional outdoor architectural and events application

SOURCE Light source: 18 x 12 watts, 4 in 1 RGBW LEDs
LED life expectancy: 50,000 Hrs.

OPTICAL SYSTEM Beam angle: 25°
Light output: 12,000 Lux @ 2m @ 10°

DYNAMIC EFFECTS Dimmer: 4 selectable dimming curves
Color mixing: RGBW
Strobe and fade effect
Built-in color and dynamic macros


CONTROL & PROGRAMMING Control protocols: DMX, Master-Slave, Auto Run
Display : TFT displayer with 4 buttons
Control channels: 3, 4, 6, 8, 11 CHs

ELECTRICAL Input voltage: 100-240V/50-60Hz
Power consumption: 200 watts

CONNECTIONS DMX connections: IP DMX In/Out cables with 3 pin screw lock connectors
Power connections: IP Power In/Out cable, 3 pin screw lock connectors

PHYSICAL Dimensions: 280.32 x 142.56 x 288.28mm
Net weight: 5 Kg
Color: Black
Housing: Aluminum
IP rating: 65
Operating temperature: -20°C/45°C

Dimensions

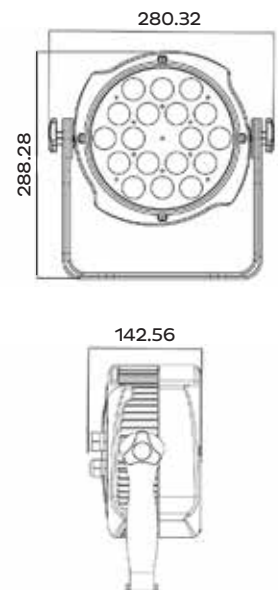

Luminous Diagram

